



Hand Winch Type Goliath GO-CS



CS 100

CS 100PS Webbing

CS 300

Lifting capacity 100 kg - 300 kg


- Compact and sturdy self sustaining lifting winches for loads up to 300 kg
- Small and inexpensive
- For base or wall mounting
- Self locking worm gear and protection cover for greater safety
- Quiet in operation; no brake ratchets
- Ideal for regular short moving strokes
- Meets the requirements of BS EN 13157

Specification



Reference		CS100	CS200	CS300	CS100PS
Winch type		Standard	Standard	Standard	Webbing
Lifting capacity 1st layer	kg	100	200	300	170
Lifting capacity last layer	kg	80	100	160	-
Rope diameter	mm	3	3 or 4	4	-
Rope capacity total	m	9	4 or 2	2	-
Capacity- webbing, 1mm thick, 20mm wide	m	-	-	-	4
Drum diameter	mm	27	27	27	27
Numbers of rope layers		8	2 or 4	2 or 4	2 or 4
Gear ratio		7:1	14:1	14:1	7:1
Lift per crank turn	mm	13	7	7	13
Required effort	kg	6	6	6	6
Minimum load for the brake function	Kg	10	10	10	10
Number of winches per box		12	12	12	12
Weight	kg	1.8	1.8	1.8	1.8

CS 100 PS is for webbing only

Dimensions (mm)



Wall Mounting

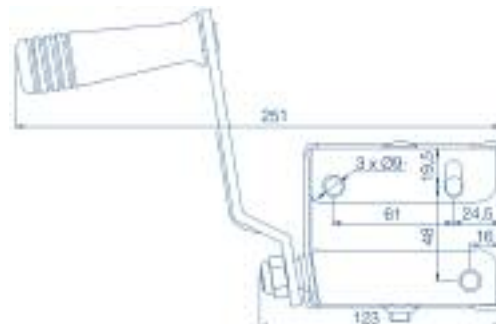

Base Mounting