





Hand Winch Type HA-WV, HA-KV



Base Mounting (KV)

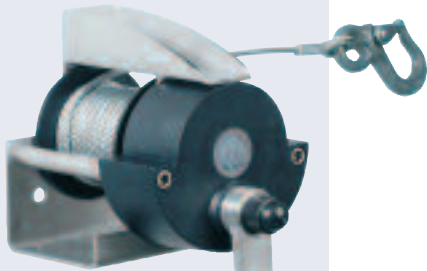

Wall Mounting (WV)



Lifting capacity 300 kg or 500 kg for wall mounting (WV) or base mounting (KV)

- Innovative winch with large rope capacity
- Corrosion resistant zinc plated with fully enclosed gears and brake encased in plastic cover
- Self locking internal brake with proven security concept
- Lightweight and compact
- Folding Crank
- Quiet in operation
- Available in 2 versions – wall mounting (WV) or base mounting with mounting frame (KV)
- Stainless Steel version available - see page 17

Specification

Lifting capacity 1st layer	kg	300	500
Lifting capacity last layer	kg	185	300
Rope diameter	mm	4	5
Rope capacity 1st layer	m	3.4	2.6
Rope capacity total	m	29	22
Number of layers		6	6
Ratio		3.1:1	4.5:1
Lift per crank turn	mm	64	46
Required effort	kg	16	20
Duty class to DIN 15020		1Em	1Em
Weight	kg	5	5

Dimensions (mm)

Capacity (kg)	300	500
A	337	337
B	170	170
C	135	135
D	105	105
E	192	192
E1	200	200
F	83	83
F1	65	65
G	160	160
H	250	250
J	130	130
K	140	140
L	60	60
MØ	11	11
NØ	13	13

